



400-159-1688
全国招商热线

 富睿阀业有限公司
FURUI VALVE CO., LTD.

手机/Mob: 汪伟 18857760100 / 秦蓉蓉 18967735222
电话/Tel: 0577-81792777 / 0577-81793777
传真/Fax: 0577-89736321

邮箱/Email: cnfr@cnfrvalve.com
网址/Web: www.furuivalves.com

地址: 浙江省温州市温州经济技术开发区星海街道滨海十三路468号4栋东首
East head, Building 4, No. 468, Binhai Thirteen Road, Xinghai Street, Wenzhou Economic and Technological Development Zone, Wenzhou City, Zhejiang Province



企业官网
Website



企业公众号
Official account



小程序
Applet

电动执行装置常规选型配件

Conventional selection accessories for electric actuators

富于创新·睿意进取


Full of innovation, wise and enterprising



执行器色调可定制 Actuator color can be customized


红色/red 蓝色/blue 黑色/black 橙色/Orange 灰色/gray

-03塑料系列外形尺寸与性能参数 -03 Dimensions and performance parameters of plastic series

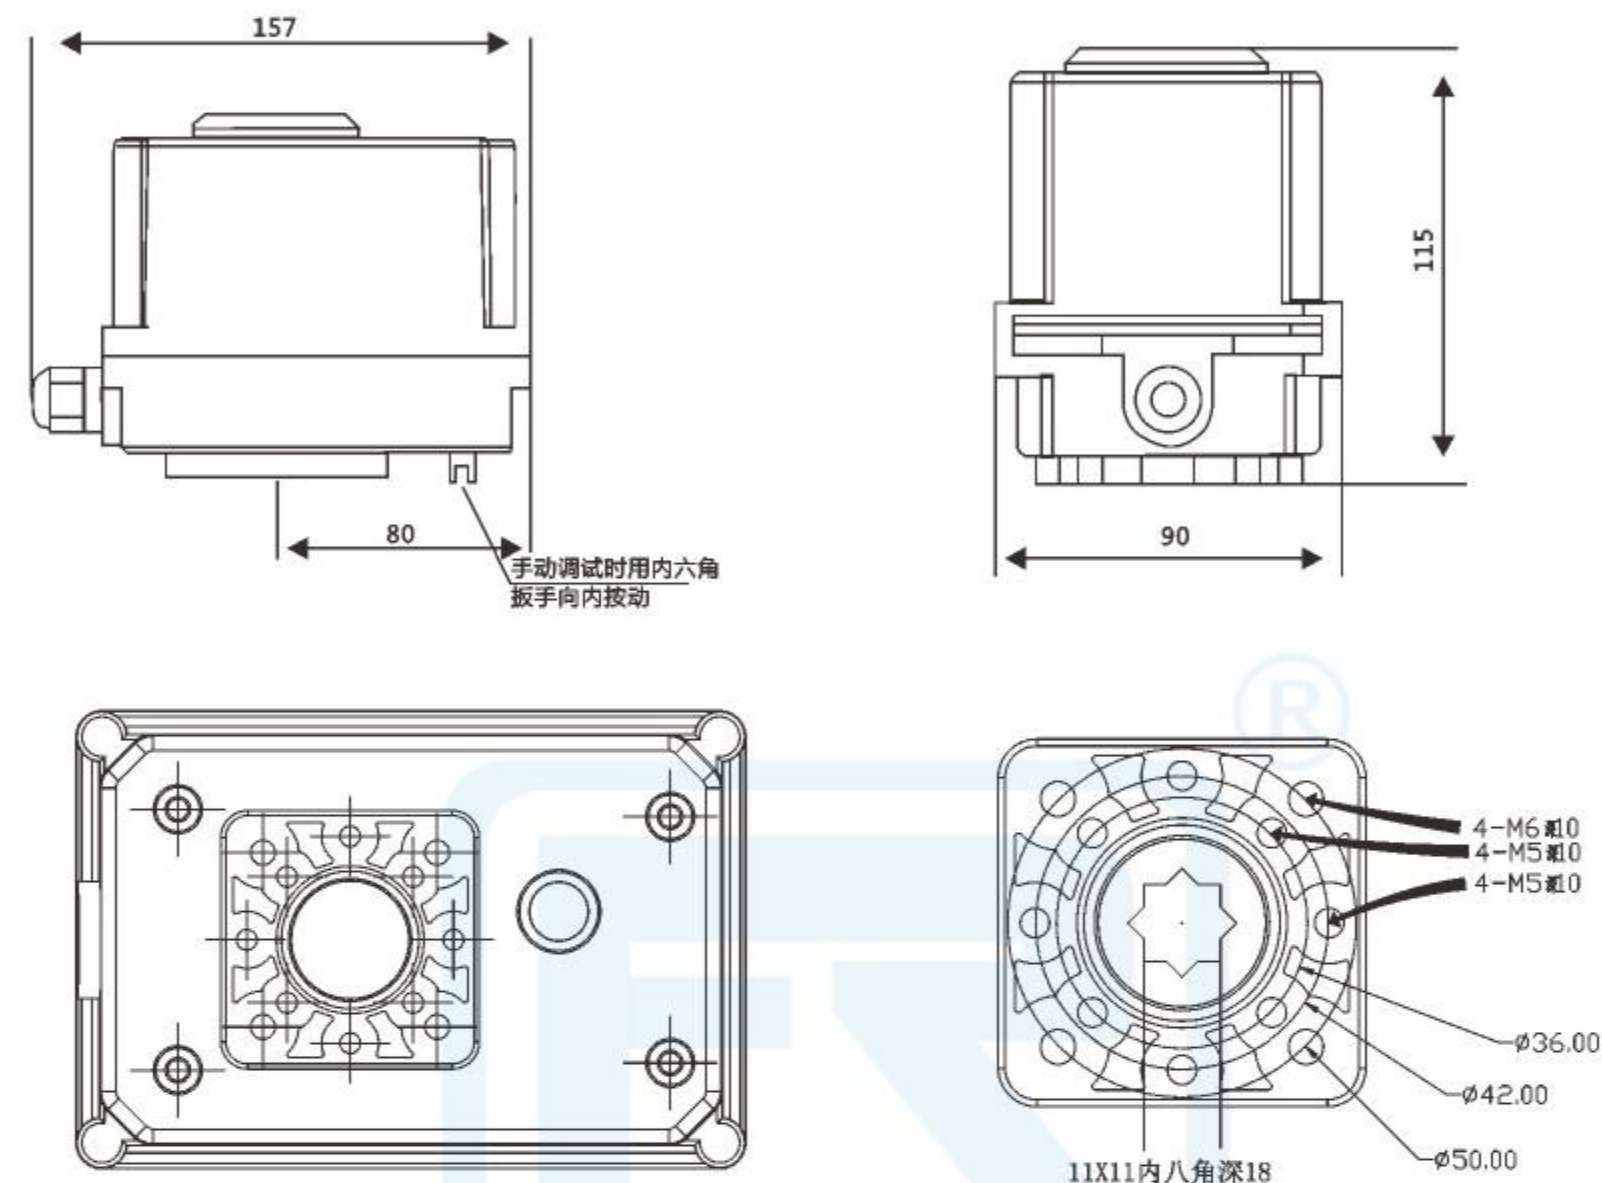


性 能	型号	-03				
	电 源	DC24V	DC220V	AC24V	AC110V	AC220V
电机功率	2W			20W		
额定电流	0.2A	—	0.2A	—	0.1A	0.05A
输出力矩	25~30Nm			30Nm		
运行时间	5S/10S/15S			10S/15S		
输出轴	方:11×11，深:18； 圆:φ12.6，深:18					
电路控制	B型、S型、R型、H型、A型、K型、D型、T型					
转动角度	0~270°					
重 量	1.4kg					
防护等级	IP-67					
环境温度	-25℃~60℃(其它温度可定做)					
安装角度	任意角度					
箱体材质	塑料件					
机 型	可配球阀	可配蝶阀	信 号		特殊功能	
03S	10-20	32-65	触点信号		无源触点	

-03系列外形尺寸与性能参数 -03 series dimensions and performance parameters

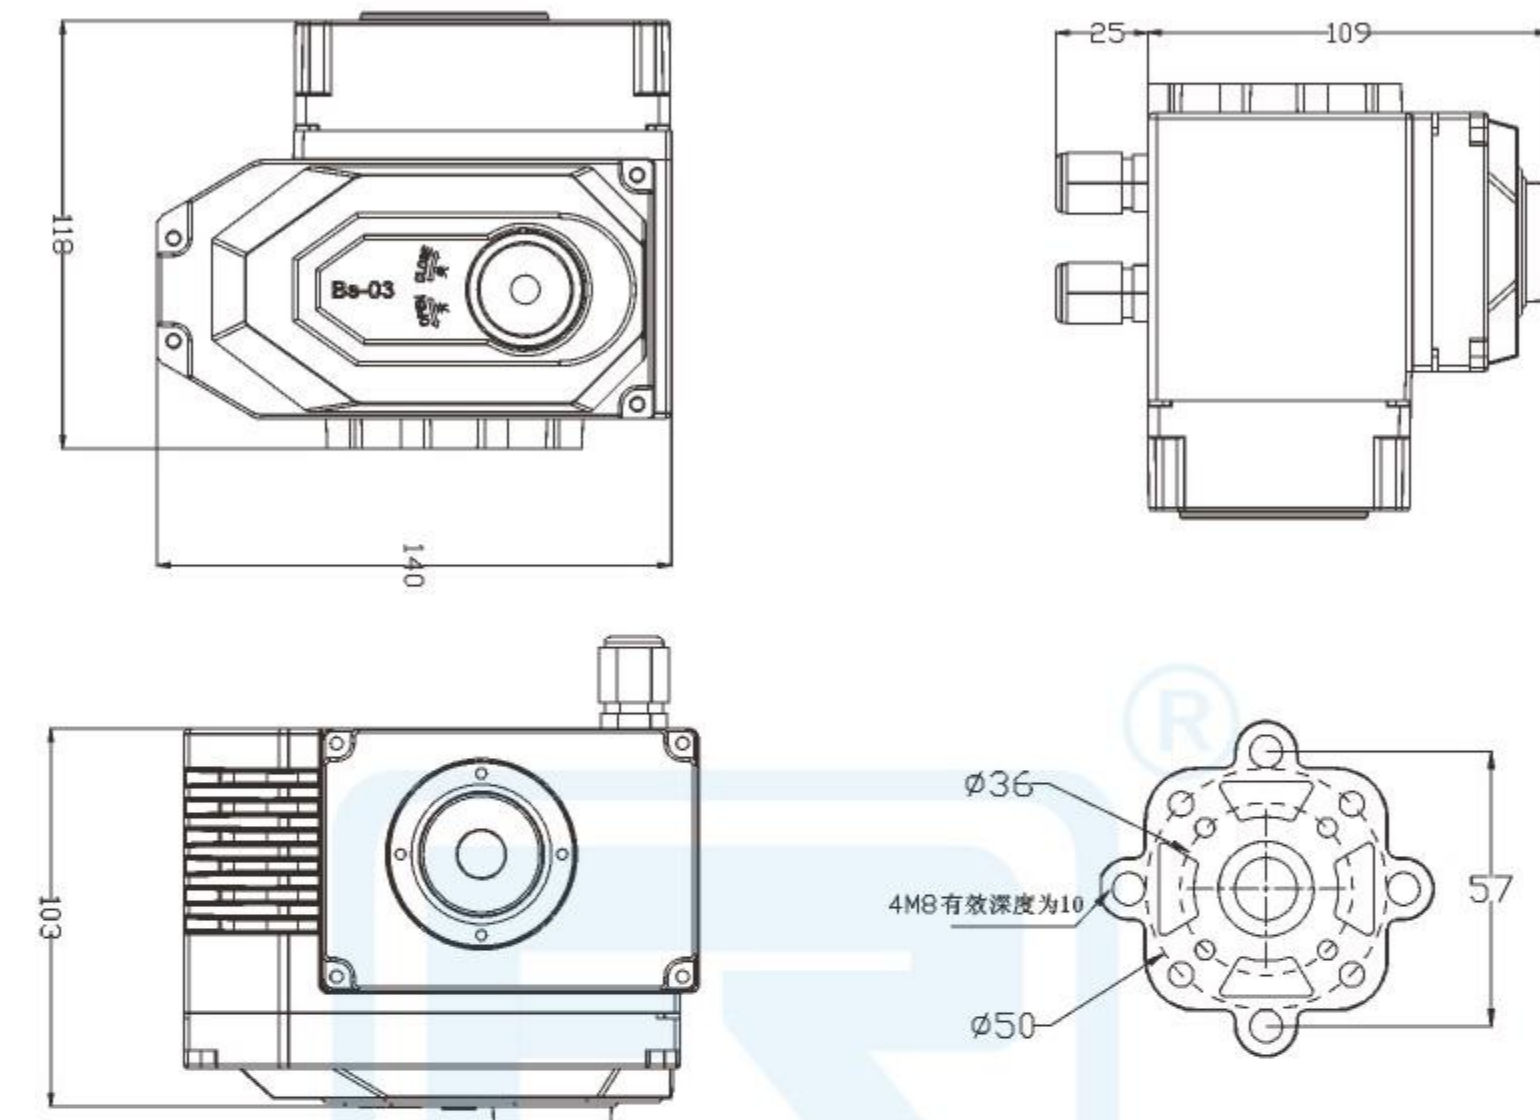


性能	型号	-03					
	电源	DC24V	DC220V	AC24V	AC110V	AC220V	AC380V
电机功率		9W		7W			
额定电流		0.7A	—	—	—	0.2A	—
输出力矩		40Nm/65Nm		15Nm/30Nm/45Nm/65Nm			
运行时间		18S		9S/10S			
输出轴		方:11×11，深: 17； 圆: φ12.6，深: 17					
电路控制		B型、S型、R型、H型、A型、K型、D型、T型					
转动角度		0~270°					
重 量		2.35kg					
耐压等级		500VAC/1分钟	1500VAC/1分钟				
绝缘电阻		100MΩ/300VDC	100MΩ/500VDC				
防护等级		IP-67					
环境温度		-25℃ ~60℃(其它温度可定做)					
安装角度		任意角度					
箱体材质		铝合金压铸件					
选装功能		过力矩保护、加热除湿器					
机 型		可配球阀	可配蝶阀	信 号		特殊功能	
03S		10-20	32-65	触点信号		无源触点	
03R		10-20	32-65	开度信号		1K、5K电位器	
03P		10-20	32-65	4-20mA		机内模块控制	

-05系列外形尺寸与性能参数 -05 series dimensions and performance parameters

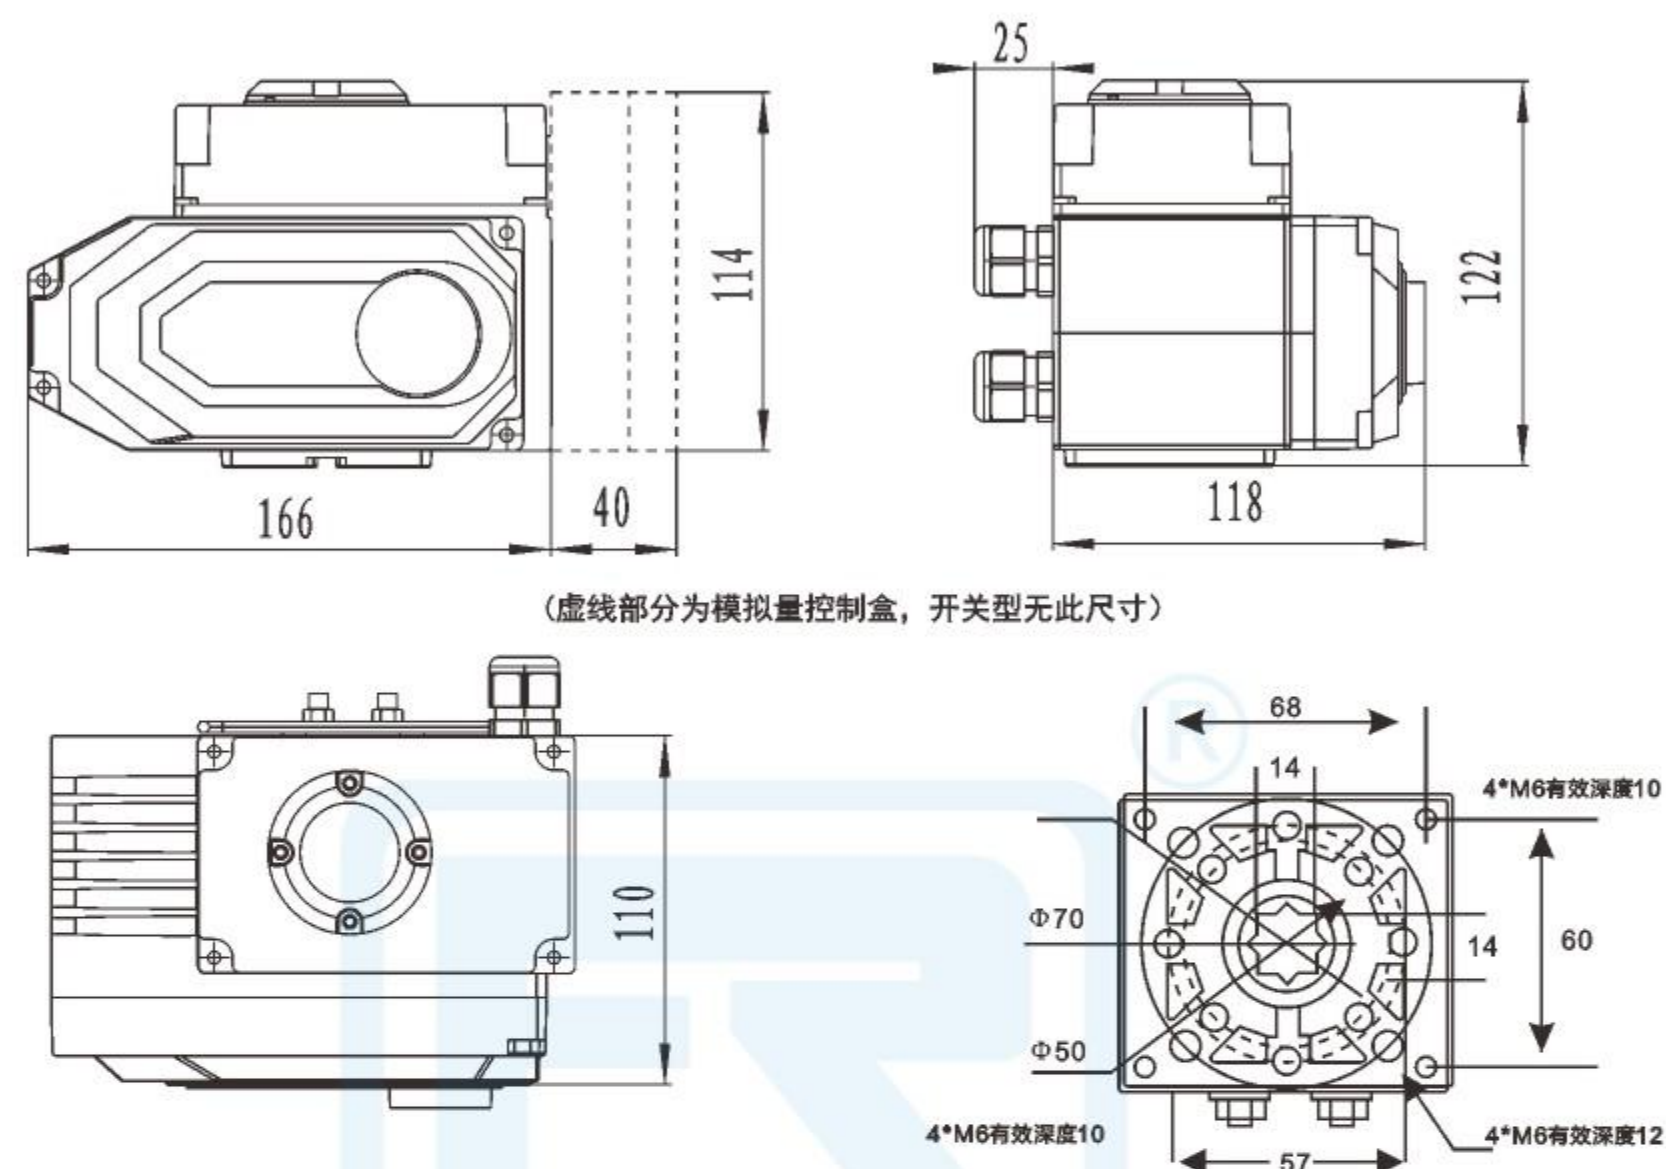


性能	型号	-05				
	电源	DC24V	DC220V	AC24V	AC110V	AC220V
电机功率	20W		10W			
额定电流	2A	0.21A	2.2A	0.48A	0.24A	0.13A
输出力矩	30Nm/50Nm		15Nm/30Nm/50Nm			
运行时间	6S/10S		10S/20S/30S			
输出轴	方:11×11/14 ×14, 深: 15 / 18; 圆: φ12. 6, 深: 26					
电路控制	B型、S型、R型、H型、A型、K型、D型、T型					
转动角度	0~270°					
重 量	3. 26kg					
耐压等级	500VAC/1分钟	1500VAC/1分钟				
绝缘电阻	100MΩ/300VDC	100MΩ / 500VDC				
防护等级	IP-67					
环境温度	-25℃ ~60℃其它温度可定做)					
安装角度	任意角度					
箱体材质	铝合金压铸件					
选装功能	过力矩保护、加热除湿器					
机 型	可配球阀	可配蝶阀	信 号		特殊功能	
05S	15-40	32-80	触点信号		无源触点	
05R	15-40	32-80	开度信号		1K、5K电位器	
05P	15-40	32-80	4-20mA		机内模块控制	

-10/16系列外形尺寸与性能参数 -10/16 series dimensions and performance parameters

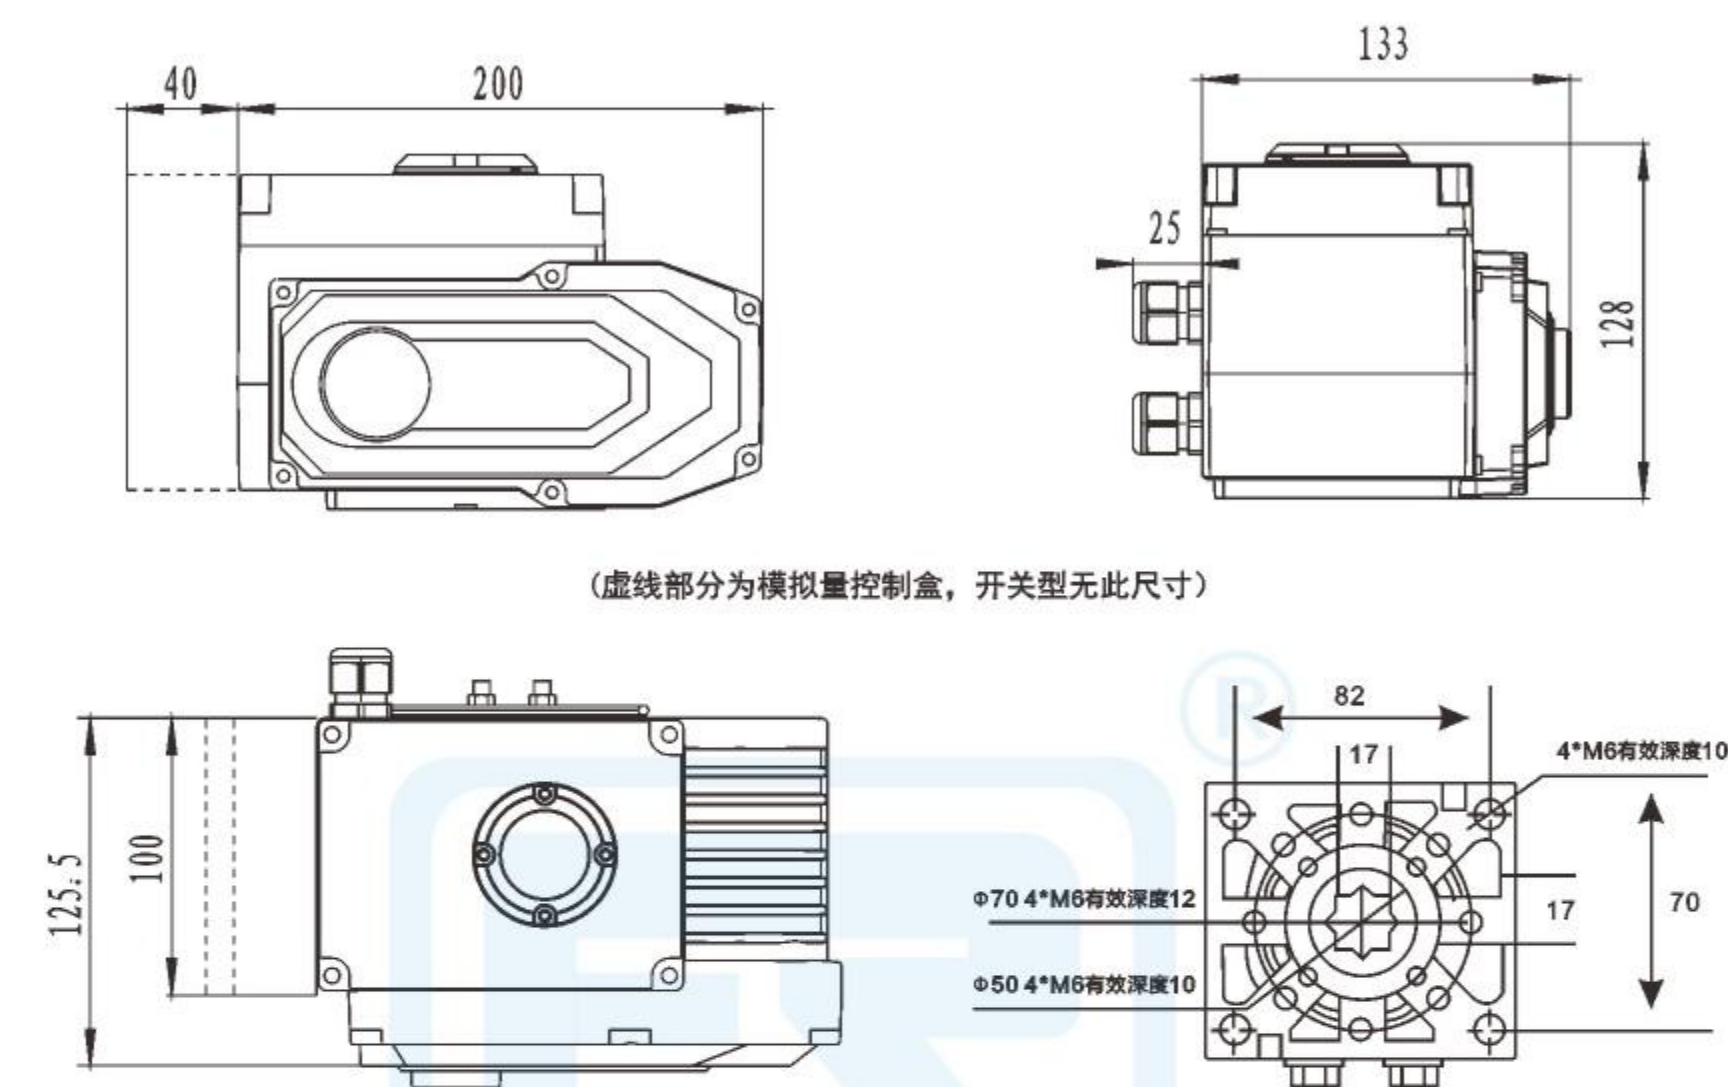


性能	型号	-10/16					
	电源	DC24V	DC220V	AC24V	AC110V	AC220V	AC415V
电机功率	40W		25W/30W				
额定电流	2. 4A	0. 32A	3A	0. 64A	0. 32A	0. 17A	
输出力矩	100Nm		50Nm/60Nm/100Nm				
运行时间	10S		13S/15S/20S/30S				
输出轴	方: 14×14/17 ×17, 深: 18/23; 圆: φ 15.7/ φ 18.95 , 深: 28						
电路控制	B型、S型、R型、H型、A型、K型、D型、T型						
转动角度	0~270°						
重 量	4. 6kg						
耐压等级	500VAC/1分钟	1500VAC/1分钟					
绝缘电阻	100MΩ/300VDC	100MΩ/500VDC					
防护等级	IP-67						
环境温度	-25℃~60 ℃(其它温度可定做)						
安装角度	任意角度						
箱体材质	铝合金压铸件						
选装功能	过力矩保护、加热除湿器						
机 型	可配球阀	可配蝶阀	信 号		特殊功能		
10/16S	25-50	80-125	触点信号		无源触点		
10/16R	25-50	80-125	开度信号		1K、5K电位器		
10/16P	25-50	80-125	4-20mA		机内模块控制		

-20/60系列外形尺寸与性能参数 -20/60 series dimensions and performance parameters

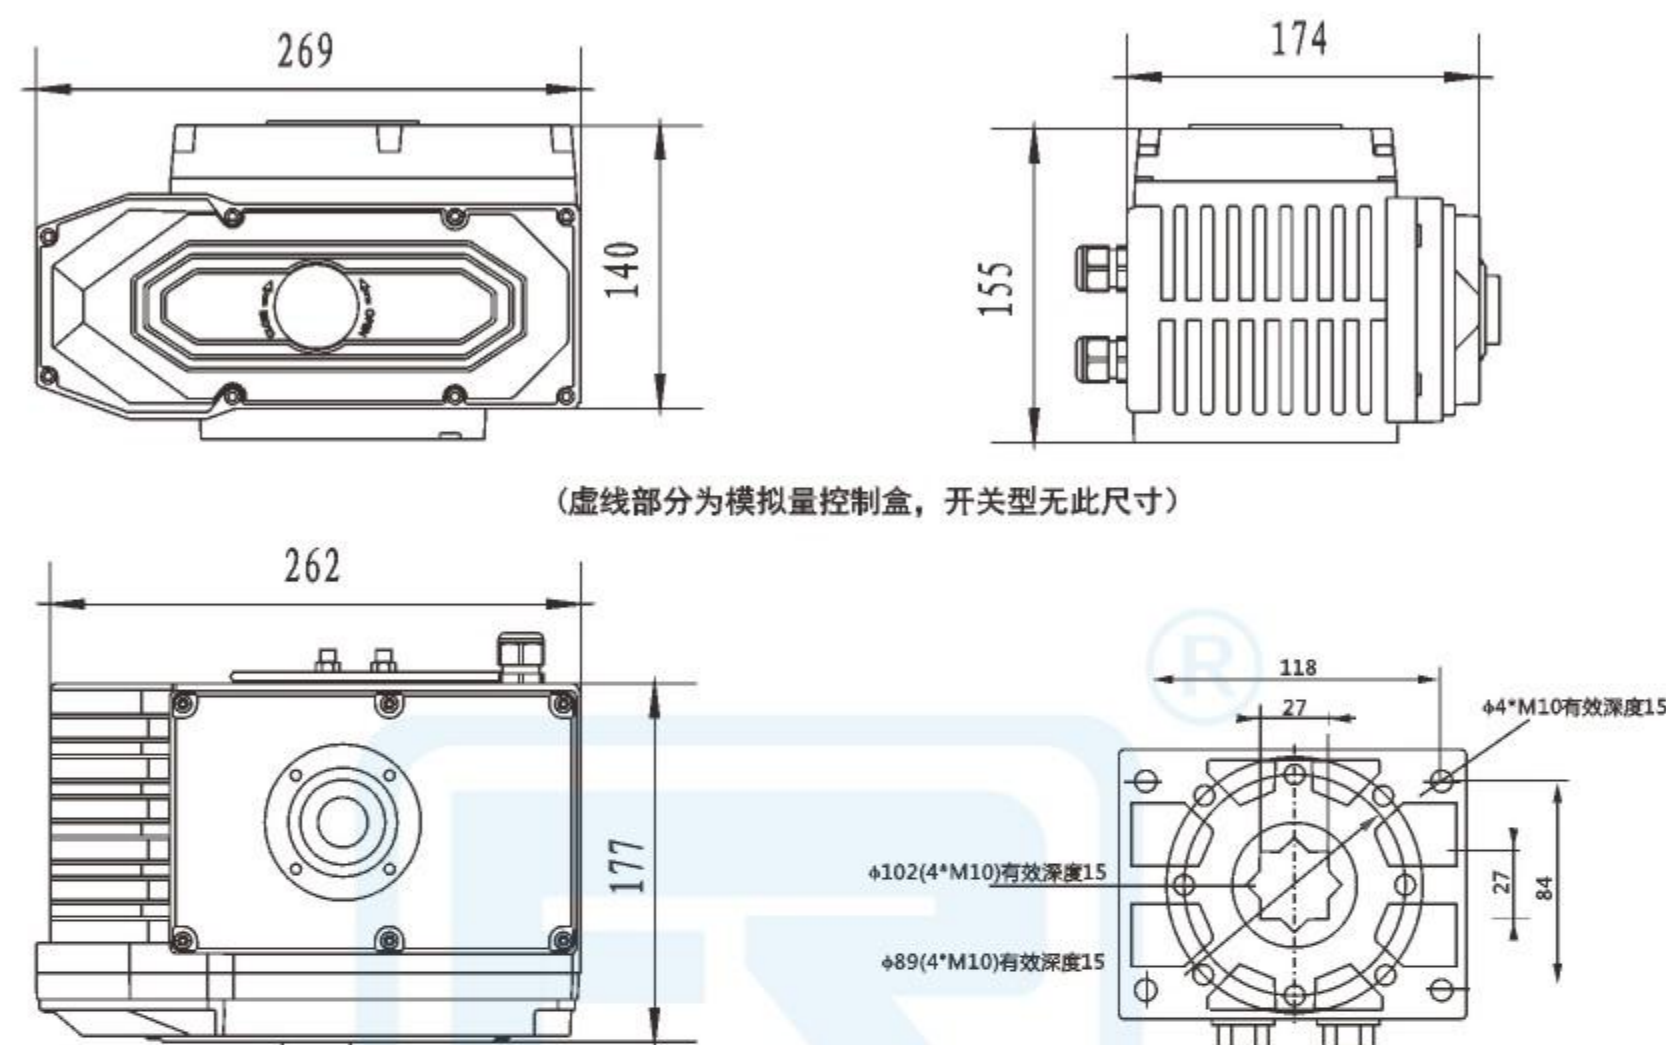

性能	型号	-20						-60						
	电源	DC24V	DC220V	AC24V	AC110V	AC220V	AC380V	DC24V	DC220V	AC24V	AC110V	AC220V	AC415V	
电机功率		40W						90W						
额定电流		8A	0.35A	5A	0.9A	0.48A	0.25A	7A	0.9A	8A	2A	0.92A	0.40A	
输出力矩		200Nm	80Nm/100Nm/150Nm/200Nm						150Nm/250Nm/300Nm/500Nm					
运行时间		10S	9S/15S/20S/30S/60S						9S/15S/20S/30S/60S					
输出轴		方: 14×14/17 ×17, 深: 18/32; 圆: φ 15.7/ φ 18.95 , 深: 28												
电路控制		B型、S型、R型、H型、A型、K型、D型、T型												
转动角度		0~270°												
重 量		10kg						10. 8kg						
耐压等级		100VAC/1分钟			1500VAC/1分钟									
绝缘电阻		500MΩ/300VDC			100MΩ/500VDC									
防护等级		IP-67												
环境温度		-25℃~60 ℃ (其它温度可定做)												
安装角度		任意角度												
箱体材质		铝合金压铸件												
选装功能		过力矩保护、加热除湿器												
机 型		可配球阀		可配蝶阀		信 号			特殊功能					
20/60S		50-80/50-125		125-250/125-300		触点信号			无源触点					
20/60R		50-80/50-125		125-250/125-300		开度信号			1K、5K电位器					
20/60P		50-80/50-125		125-250/125-300		4-20mA			机内模块控制					

-100/200系列外形尺寸与性能参数 -100/200 series dimensions and performance parameters

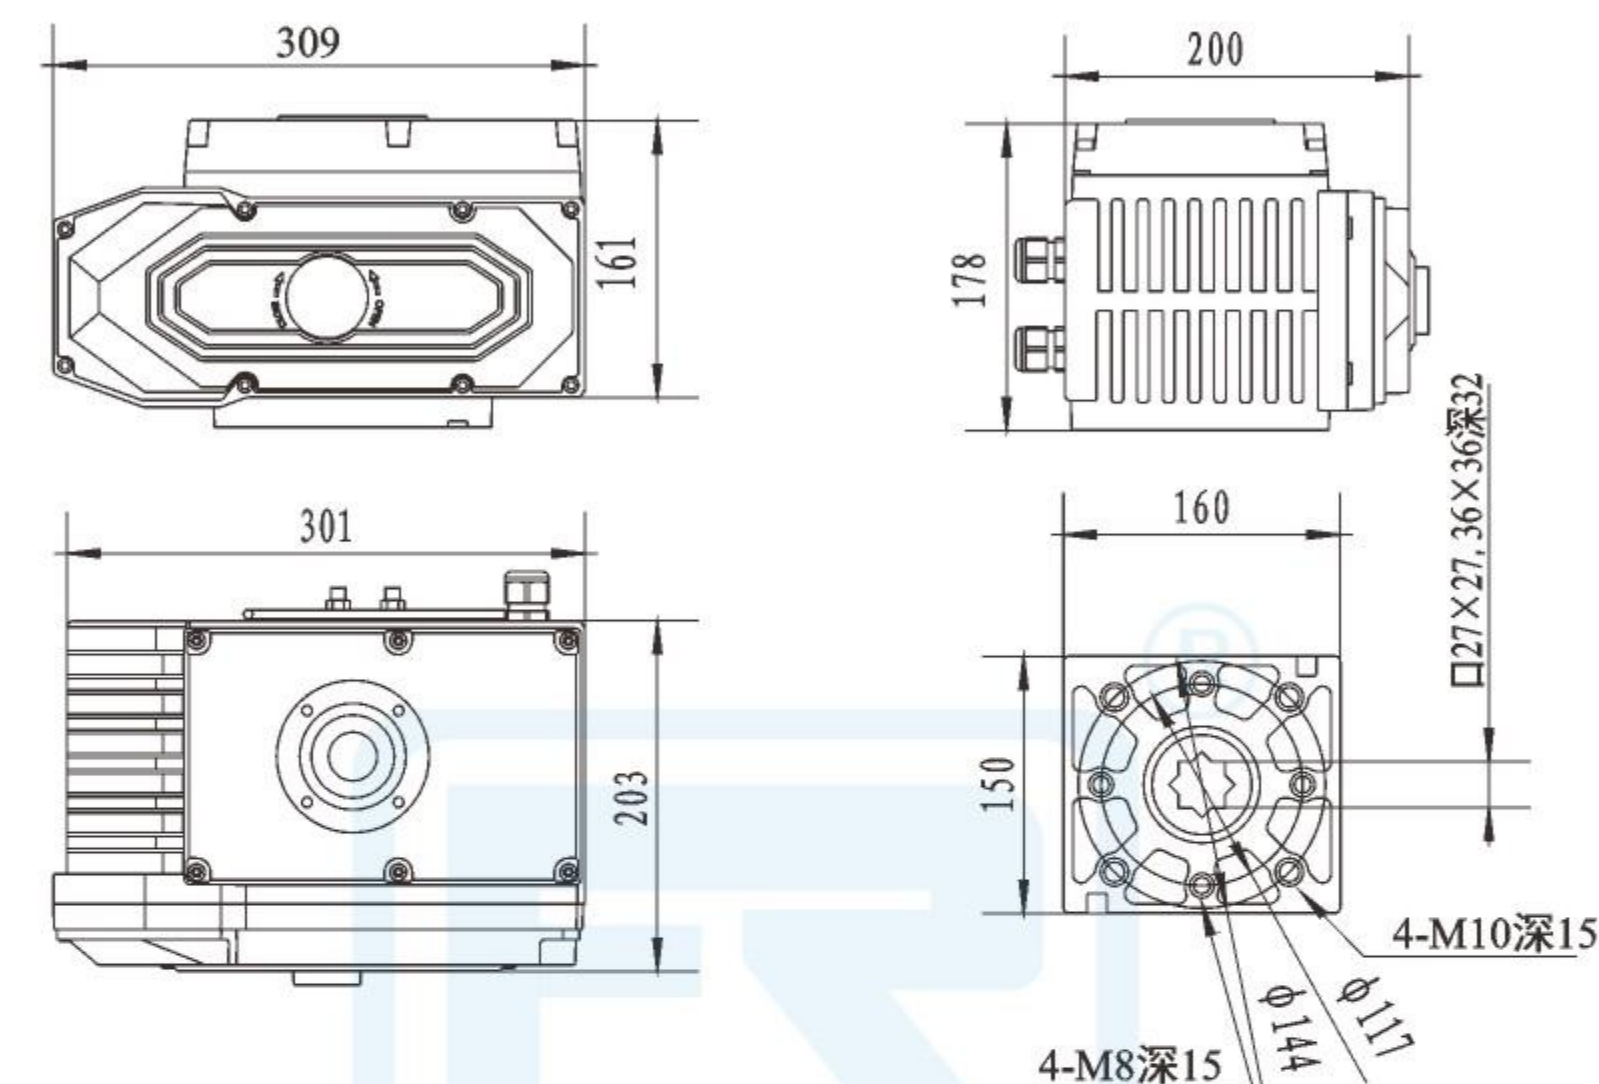

性能	型号	-100				-200			
	电源	AC24V	AC110V	AC220V	AC380V	AC24V	AC110V	AC220V	AC415V
电机功率	150W					250W			
额定电流	9A	2.2A	1.2A	0.48A	9A	2.2A	1.2A	0.45A	
输出力矩	800Nm/1000Nm					2000Nm			
运行时间	30S/50S					100S			
输出轴	方:27×27, 深: 32; 圆: φ31.65, 深: 45					Max φ45, 深: 65			
电路控制	B型、S型、R型、H型、A型、K型、D型、T型								
转动角度	0~270°								
重 量	11.9kg					12.2kg			
耐压等级	1500VAC/1分钟								
绝缘电阻	100MΩ/500VDC								
防护等级	IP-67								
环境温度	-25℃~60℃(其它温度可定做)								
安装角度	任意角度								
箱体材质	铝合金压铸件								
选装功能	过力矩保护、加热除湿器								
机 型	可配球阀	可配蝶阀		信 号			特殊功能		
100/200S	65-150/65-250	125-350/125-400		触点信号			无源触点		
100/200R	65-150/65-250	125-350/125-400		开度信号			1K、5K电位器		
100/200P	65-150/65-250	125-350/125-400		4-20mA			机内模块控制		



售后服务和质量保证承诺

一、售前服务

做到技术与销售的无缝对接服务，让用户的每一次采购都有服务的体验。

- ①进行采购前产品技术沟通和交流，主动给予建议。
- ②在进行产品型号选择时考虑是否成本最低化，效率最大化。
- ③不能达到使用要求时，根据客户的特殊要求，安排设计师合理改善。

二、售中服务

尊重每位用户；给用户一份轻松，放心的整体价值服务。

- ①进行性价比：比价格，比质量，比服务，反思是否有不做到位的地方。
- ②在合作过程中，依照合同，保质保量准时交货，随时保持与用户联系。
- ③生产期间，相关技术人员可来我司进行产品监造和检验，同时，我司会提供该产品的结构图及详细文件资料，来做监造文件。
- ④使用定做的产品，可协商专业技术人员亲临现场指导。
- ⑤我公司在发货前以电话进行产品型号、规格、数量、件数的确认。

三、售后服务

完善的服务铸就完美的企业让客户无后顾之忧。

- ①按合同要求提供产品的合格证、生产许可证、检验报告、安装说明书等。
- ②顾客在验收产品过程中，如出现与合同要求不符时，我司接到顾客通知后两小时内给予处理。
- ③我司提供十二个月的产品质保期，时间从验收合格之日起计算。
- ④在正确安装和使用下，出现产品质量问题，本公司将负责到底。

四、包修包换承诺

- ①在正常的储运、安装、保养、使用条件下，因产品的质量不能正常使用时，提供三保四包：保质、保量、保及时、包修、包换、包退、包损失。
- ②在接到质量信息反馈时，将在48小时内提出处理意见及解决方案。
- ③可根据用户需求协商提供备品、备件和安装、调试、维修服务。

以上四点是本公司对售后服务的承诺。竭诚欢迎广大用户指导修正，请提出宝贵意见，参照改进。真诚希望我们之间合作愉快。



AFTER-SALES SERVICE AND QUALITY ASSURANCE COMMITMENT

1、Pre-sales service

Achieve the seamless connection between technology and sales, and let users have a service experience with every purchase.

- ① Conduct product technical communication and exchange before purchase, and offer suggestions actively.
- ② When selecting product models, consider whether to minimize costs and maximize efficiency.
- ③ If the use requirements cannot be met, the designer shall be arranged for reasonable improvement according to the special requirements of customers.

2、On-sale service

Respect every user; Give users a relaxed and assured overall value service.

- ① Compare performance with price: compare price, quality and service, and reflect on whether there is anything that is not done well.
- ② In the process of cooperation, according to the contract, deliver goods on time with quality and quantity guaranteed, and keep in touch with users at any time.
- ③ During production, relevant technical personnel can come to our company for product supervision and inspection. At the same time, our company will provide the structure diagram and detailed documents of the product to make supervision documents.
- ④ For the use of customized products, professional technicians can be consulted for on-site guidance.
- ⑤ Our company confirms the product model, specification, quantity and quantity by telephone before delivery.

3、After-sales service

Perfect service creates perfect enterprise, and customers have no worries.

- ① Provide product certificates, production licenses, inspection reports, installation instructions, etc. according to the contract requirements.
- ② In the process of customer acceptance, if there is any discrepancy with the contract requirements, our company will deal with it within two hours after receiving the customer's notice.
- ③ Our company provides a 12-month product warranty period from the date of acceptance.
- ④ Under the correct installation and use, the company will be responsible for the product quality problems.

4、Commitment to repair and replacement

- ① Under normal storage, transportation, installation, maintenance and use conditions, if the product cannot be used normally due to quality problems, three guarantees and four guarantees shall be provided: quality assurance, quantity assurance, timeliness assurance, repair assurance, replacement assurance, return assurance and loss assurance.
- ② When receiving the feedback of quality information, it will put forward handling suggestions and solutions within 48 hours.
- ③ Spare parts and installation, commissioning and maintenance services can be provided through negotiation according to user needs.

The above four points are our company's commitment to after-sales service. We sincerely welcome the majority of users to guide the correction. Please put forward your valuable suggestions for reference and improvement. We sincerely hope that our cooperation will be pleasant.